



CERTIFICATE





"EU-TYPE EXAMINATION OF SAFETY COMPONENTS FOR LIFTS" № 1038K/TE/19.03.2018

"LIFT CERTIFICAT TU - SOFIA" - conformity assessment notified body with Permission № 108-OC/07.06.2016, issued by STATE AGENCY FOR METROLOGICAL AND TECHNICAL SURVEILLANCE (SAMTS) with European Identification № 2201

Verified on the basis of examinations and tests that the product described below is in accordance with the essential safety requirements of the Directive 2014/33/EU, introduced by the "Ordinance for the essential requirements and conformity assessment of lifts and the safety devices for lifts".

Applicant:

(name, address)

ABT POLİÜRETAN SAN. TİC.

DİLER COSKUN

Address: İkitelli San. Bölgesi, ISTEKS Dokuma San.

Sit. D-1 Blok No:3, İstanbul - TURKEY

Manufacturer of the safety component:

(name, address)

ABT POLİÜRETAN SAN. TİC.

DİLER COŞKUN

Name and type of the safety component:

Buffer Type: EYL-3

Additional data for identification of the

safety component:

Energy accumolation buffer with non linear

characteristics.

The additional data and technical characteristics are

according to "Annex 1" of this certificate

Application form of Conformity assessment:

№ 1038/09.11.2017

Testing laboratory:

STL at "LIFT Certificat TU-Sofia"

Test report:

№ 250/25.03.2013

Summary report of Conformity assessment:

Applied Directives and Standards:

№ 1038K/19.03.2018 Directive 2014/33/EU - Annex IVA (Module B),

EN81-50:2014 - p.5.5, EN81-20:2014

This certificate contains Annex 1 - "Technical Characteristic", which is an integral part of it. The certificate expires on the occurrence of changes in the conditions under which it was issue or after expiring the validity period. Please, check "valid until" date below.

Certificate 1038K/TE/19.03.2018 replaced certificate 1038/TE/22.01.2018, which expire due to changes in the

conditions under which it was issue.

Date of issue: 19 March 2018

Valid until: 19 March 2023

MHead of NB IFT Certificate TUzSofia": nuфukam

Assoc. Prof. PhD Eng. Georgi Iliev /

Address: 8 Kliment Ohridski Blvd., TU-Sofia, lab.4100, 1756 Sofia, Bulgaria, Tel/Fax: +359 2965 2984, e-mail:giliev@tu-sofia.bg, www.liftcertificate.eu

ФОС 1.9 / Page 1 of 2

TECHNICAL CHARACTERISTICS

of safety component: Buffer, Type: EYL-3

1. Application of the energy dissipation buffer.

The energy accumolation buffer with non linear characteristics, Type: EYL-3 is designed to be use as bottom limit of the travel of the lift car and counterweight.

It confirms to the essential safety requirements of the applied Directives and Standards.

2. Parameters of the system

Limits of permissible masses (kg): 300 – 3000


Maximum impact speed (m/s): 1.2 Maximum rated speed (m/s): 1

Fixation: Hex Bolt - 1 x M16

Environmental conditions: Ambient temperature range: -15 \div +50°C


Relative humidity: $\leq 80\%$

3. Assembly drawing and picture





4. Graphical sample of the test results

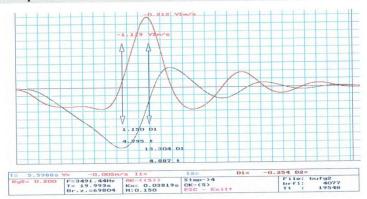

Head of NB "LIFT Certificate TU-Sofia":

/ Assec Prof. PhD Eng. Georgi Iliev /